

info@tr-interiorsystems.co.nz


Installation Guide


Gridlux T Rail in Grid





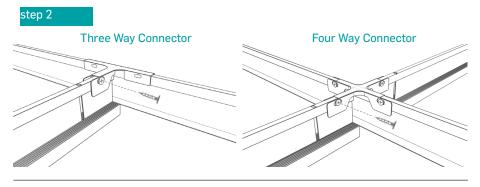

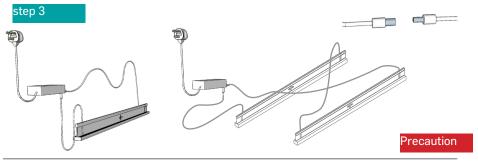



step 1

Construct grid as per manufacturers instruction. Grid Lux is much like a regular cross tee, omit standard cross tees where Grid Lux is specified. Where a 600mm Grid Lux spans two cross tees, install grid as per usual

* Please note: It is essential that the cross tee web is 38mm high for the system to work

step 2

Once the grid is created, place Grid Lux into grid. Fix with 3 or 4 way connectors depending on configuration. Screw the connector clip into the grid to ensure seismic compliance.

step 3

Connect Grid Lux to driver. Daisy chain the lights where multiple units run off one driver. *Please check specification for configuration.

step 4

Plug driver into power socket. Warning: Make sure that the Grid Lux chain is complete before connecting to power source.

Male plug needs to be paired with female plug.

Minimum 1200 luminairs of light per driver.

step 5


Place tile into grid as per standard installation.

Cover tiles and Grid Lux in insulation as required. The heat sink is below the tiles.

info@tr-interiorsystems.co.nz

Installation Guide

Gridlux T Rail in Grid

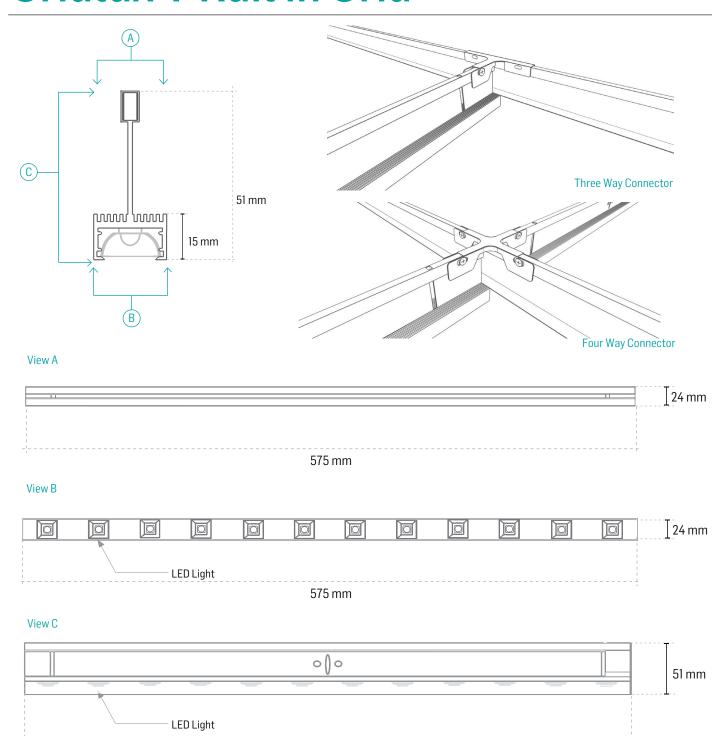

Wellington Head Office

12 Glover St, Ngauranga Wellington 6035 PO Box 38533 Wellington Mail Centre 5045 /t/ 04 499 5915

Auckland

575 mm

19 - 21 Fairfax Ave, Penrose, Auckland 1061 PO Box 112360, Penrose, Auckland 1642 /t/ 09 571 0395

Christchurch

69 Disraeli St, Addington Christchurch 8023 PO Box 7197 Christchurch 8240 /t/ 03 366 2507