




MAINTENANCE GUIDE

ECLIPSE ALUMINIUM SUITE

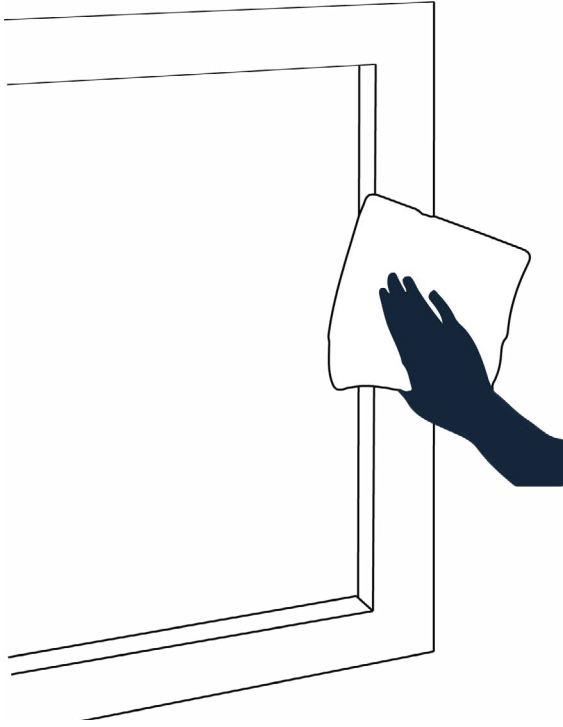

CLEANING

- Cleaning should take place at least every six months or as required.
- Carefully remove any loose surface deposits with a wet sponge.
- Use a soft cloth (non-abrasive) and a dilute solution of a mild detergent, eg, pH-neutral liquid dishwashing detergent in warm water to remove dust, and other deposits. For a deeper clean, use isopropyl alcohol or Methylated spirits and rinse with warm soapy water. Abrasives cleaners such as kerosene, turpentine or white spirit will alter the appearance of the aluminium finish and should not be used.
- If there is a grain in the finish then cleaning should always be with the grain.
- Ensure the surfaces are thoroughly rinsed with clean fresh water after cleaning to remove all residues.
- Keep sunscreens away from powdercoating, some sunscreens adversely affect powdercoated finishes.
- Clean only when powder coated surface temperature is below 25 C "
- DO NOT rub powder coating excessively, especially metallic finishes.
- Rollers/Wheels - Keep the track and mohair seals free of debris by vacuum cleaning regularly. Apply a good quality silicone spray to the track.
- Hinges - Regularly clean hinges and apply WD40 lubricant when necessary

The aluminium suite will suffer permanent damage from: plaster, mortar and paint splashes - Protect if splashes occur - Immediately wash down the aluminium with water or methylated spirits - do not allow splashes to harden. Use cleaning methods described above and do not use solvents or abrasive cleaners.

For further assistance please contact your local T&R Interior Systems.

Wellington Head Office
12 Glover St, Ngauranga
Wellington 6035
PO Box 38533
Wellington Mail Centre 5045
/t/ 04 499 5915

Auckland
19 - 21 Fairfax Ave,
Penrose, Auckland 1061
PO Box 112360,
Penrose, Auckland 1642
/t/ 09 571 0395

Christchurch
69 Disraeli St, Addington
Christchurch 8023
PO Box 7197
Christchurch 8240
/t/ 03 366 2507