


13mm GIB Noiseline
Fix with 25mm x 6g GIB
Grabber ST screws at
300mm centers.

WHISPERWALL Stud

Results apply using R1.8 Pink
Batts or 75mm Pink Batts
Silencer insulation or similar.

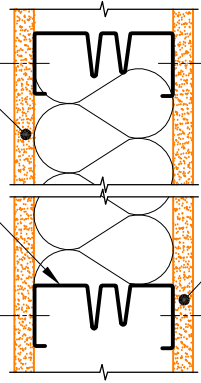


STC-52 RATING

13mm GIB Noiseline
Fix with 25mm x 6g GIB
Grabber ST screws at
300mm centers.

13mm GIB Noiseline
Fix with 25mm x 6g GIB
Grabber ST screws at
300mm centers.

WHISPERWALL Stud

Results apply using R1.8 Pink
Batts or 75mm Pink Batts
Silencer insulation or similar.

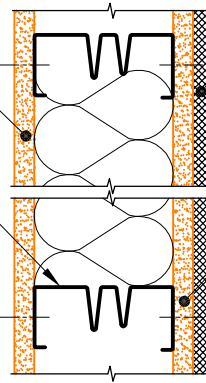

STC-58 RATING

10mm GIB Noiseline
Fix with 41mm x 6g GIB Grabber ST
screws at 300mm centers. Screws
fixed adjacent to first layer screws.
(1 side only)


13mm GIB Noiseline
Fix with 25mm x 6g GIB
Grabber ST screws at
300mm centers.

WHISPERWALL Stud

13mm GIB Noiseline
Fix with 25mm x 6g GIB
Grabber ST screws at
300mm centers.

10mm GIB Noiseline
Fix with 41mm x 6g GIB
Grabber ST screws at
300mm centers

Results apply using R1.8 Pink
Batts or 75mm Pink Batts
Silencer insulation or similar.

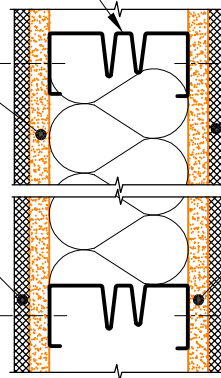

STC-62 RATING

10mm GIB Noiseline
Fix with 41mm x 6g GIB Grabber ST
screws at 300mm centers. Screws
fixed adjacent to first layer screws.

13mm GIB Noiseline
Fix with 25mm x 6g GIB
Grabber ST screws at
300mm centers